
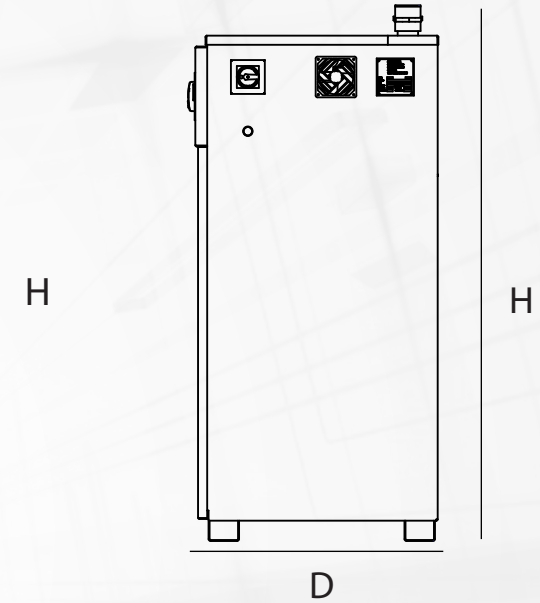


ETHYLENE SCRUBBER

CE 200/400/600 F | M
TECHNICAL DATA SHEET

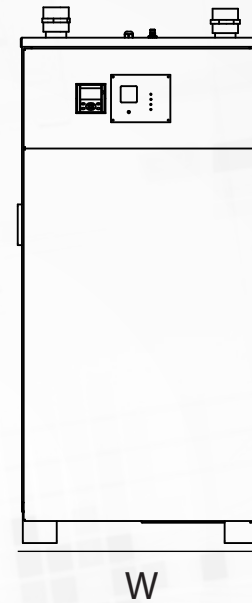

ETHYLENE SCRUBBER TECHNICAL DATA SHEET

MODEL	W (mm)	D (mm)	H (mm)	WEIGHT (Kg)	FRUIT CAPACITY (T)	CATALYTIC MASS	POWER 50Hz (kW)	CURRENT (A)	VOLTAGE (V)	EXTERNAL TEMPERATURE (C°)	ELECTRIC	AIR
200M	550	570	1600	550	200	11,5	2.5	10,0	230 VAC monophasé ±5	5-35	230VAC/ 1/ 50Hz	Tube: Ø6/8 Pression Min: 6 bar Max: 8 bar
400M	700	720	1600	720	400	22,0	3.6	15,0	230 VAC monophasé ±5%			
400F	725	740	1610	720	400	22,0	5.8	14,5	400 VAC triphasé ±5%			
600F	795	830	1850	800	600	30,0	6.4	16,0	400 VAC triphasé ±5%			

* **M**: Mobile (no installation, it is placed inside the room) | **F**: Fixed (installation out of the room, connected to the pipeline)
* Fruit Capacity subjected to change according on cultivar.

ABSOGGER SAS
82100 - Les Barthes, France.
+33 5 63 31 63 76
absogger@absogger.fr

