



A

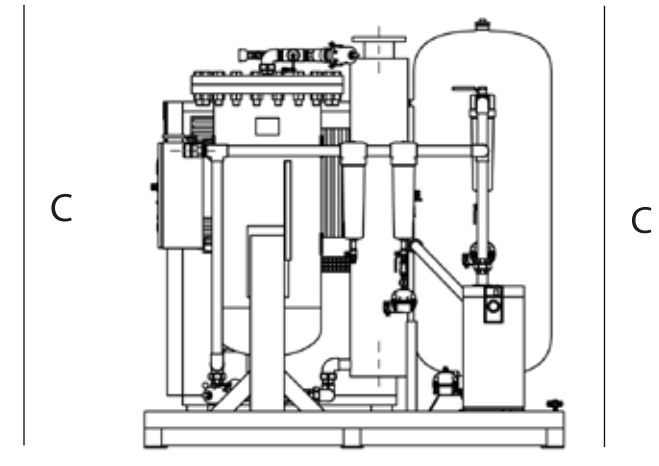

B

PSA\_F: TECHNICAL DATA SHEET PSA\_F4/PSA\_F30

MODEL	CV	POWER 50Hz (Kw)	FLOW (m3/h a 20°C)			CAPACITY (Tons/24h)			A W (mm)	B D (mm)	C H (mm)	WEIGHT (Kg)	OUTLET			DRAIN
			1%	2%	5%	1%	4%	5%					N2	AIR	O <sup>2</sup>	
PSA F4	4	3	7,5	9,4	10,9	9	31	37	1630	1230	2060	600	1/2" GF	3/4" GF		Ø16mm
PSA F10	12	7,5	23,1	28,6	33,4	29	95	115	1760	1420	1800	900	3/4" GF	3/4" GF		Ø16mm
PSA F15	15	11	38,3	47,6	55,5	48	159	190	2300	1600	2030	1200	3/4" GF	1" GF		Ø16mm
PSA F20	20	15	47,7	59,3	69,2	60	198	237	2250	1600	1930	1400	1" GF	1" GF		Ø16mm
PSA F25	25	18,5	65,1	80,9	94,3	82	270	323	2250	1850	2150	2000	1" GF	1"1/2 GF		Ø16mm
PSA F30	30	22	82,6	103	120	103	342	410	2610	1980	2020	2650	1"1/2 GF	1"1/2 GF	3" GF	Ø16mm

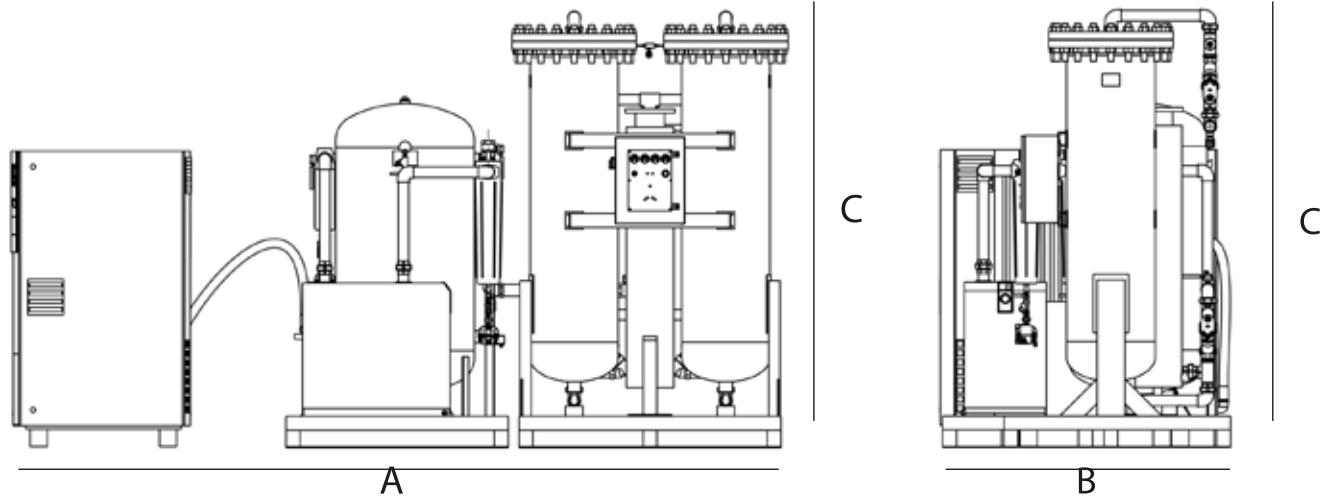

PSA\_F: TECHNICAL DATA PSA\_F35/PSA\_F100

MODEL	CV	POWER 50Hz (Kw)	FLOW (m3/h a 20°C)			CAPACITY (Tons/24h)		A W (mm)	B D (mm)	C H (mm)	WEIGHT (Kg)	OUTLET			DRAIN	
			1%	2%	5%	1%	5%					N2	AIR	O <sup>2</sup>		
PSA F35	35	25	98	122	142	123	487	2600	2000	2700	2450	TAILOR MADE / ON REQUEST				
PSA F40	40	30	110	136	159	138	546	2600	2200	2300	2900					
PSA F50	50	37	134	167	195	168	667	4600	1700	2600	3300					
PSA F60	60	45	166	206	240	207	822	5000	2000	2400	3500					
PSA F75	75	55	199	248	289	250	990	5000	2200	2600	4300					
PSA F100	100	75	237	295	344	297	1179	5100	2200	2400	5000					