



A

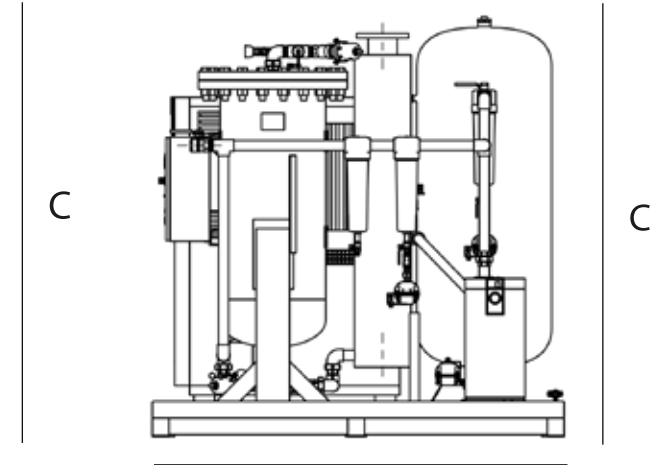

B

PSA_FN: TECHNICAL DATA PSA_F4N/PSA_F30N

MODEL	CV	POWER 50Hz (Kw)	FLOW (m3/h a 20°C)			CAPACITY (Tons/24h)		A W (mm)	B D (mm)	C H (mm)	WEIGHT (Kg)	OUTLET			DRAIN
			0,5%	1%	2%	1%	2%					N2	AIR	O ²	
PSA F4N	4	3	8	10	12	12	25	1630	1230	1450	550	1/2" GF	3/4" GF		Ø16mm
PSA F10N	12	9	30	38	48	48	99	2000	1400	2050	1200	3/4" GF	3/4" GF		Ø16mm
PSA F15N	15	11	37	48	59	60	123	2250	1600	1950	1500	1" GF	1" GF		Ø16mm
PSA F20N	20	15	51	65	81	82	168	2250	1700	2150	1800	1" GF	1" GF		Ø16mm
PSA F25N	25	18,5	65	83	103	103	213	2600	1800	2020	2500	1"1/2 GF	1"1/2 GF	3" GF	Ø16mm
PSA F30N	30	22	77	98	122	123	253	2600	1900	2200	2550	1"1/2 GF	1"1/2 GF	3" GF	Ø16mm

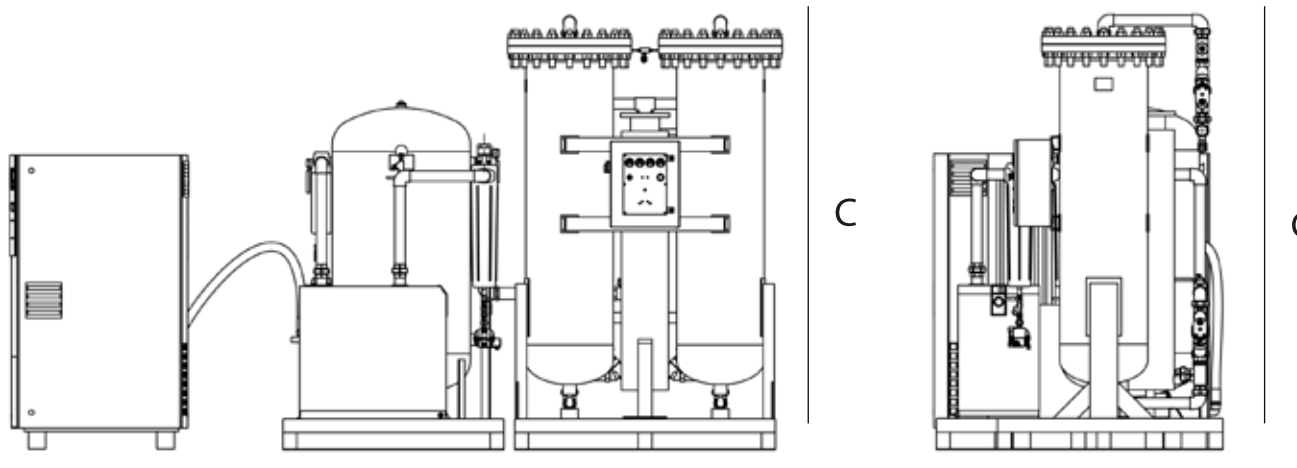

A

B

PSA_FN: TECHNICAL DATA PSA_F40N/PSA_F120N

MODEL	CV	POWER 50Hz (Kw)	FLOW (m3/h a 20°C)			CAPACITY (Tons/24h)		A W (mm)	B D (mm)	C H (mm)	WEIGHT (Kg)	OUTLET		INSTRUMENT	DRAIN
			0,5%	1%	2%	1%	2%					N2	O ²		
PSA F40N	40	30	105	134	167	168	347	4600	1600	2600	3300	2" GF	2" GF	BRIDE ISO 6" PN10/PN16	Ø16mm
PSA F50N	50	37	130	166	206	207	427	4600	1700	2600	3300	TAILOR MADE / ON REQUEST			
PSA F60N	60	45	156	199	248	250	515	5000	2000	2400	3500				
PSA F75N	75	55	186	237	295	297	613	5000	2200	2600	4300				
PSA F100N	100	90	250	295	344	399	823	5100	2200	2400	5000				
PSA F120N	120	90	318	406	504	509	1048	5100	2200	2400	5000				